


NETXS

Cat6 4/23 UTP Cable

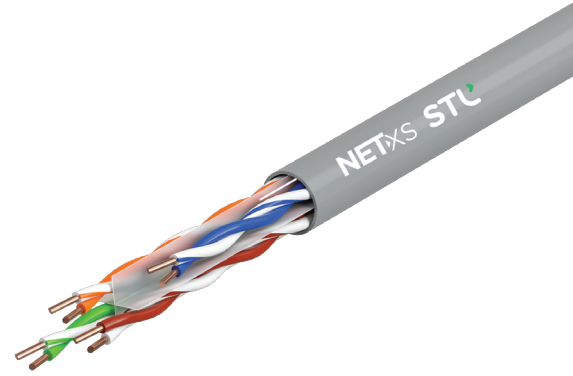

Application:


- Analog Audio and Video Signal Transfer
- Riser and Plenum
- Horizontal Cabling
- IEEE 802.5 4/16 MB; ISDN; TPDDI; ATM 155
- IEEE 802.3: 10Base-T; 100Base-T; 1000Base-T
- Power over Ethernet: PoE / PoE+

Standards:

- ANSI / TIA-568.2-D
- ISO / IEC 11801
- IEEE 802.3af / at

Flame Resistance:

CMP STL: NFPA 262, IEC 60332-1-2
 CMR STL: UL1666, IEC 60332-1-2

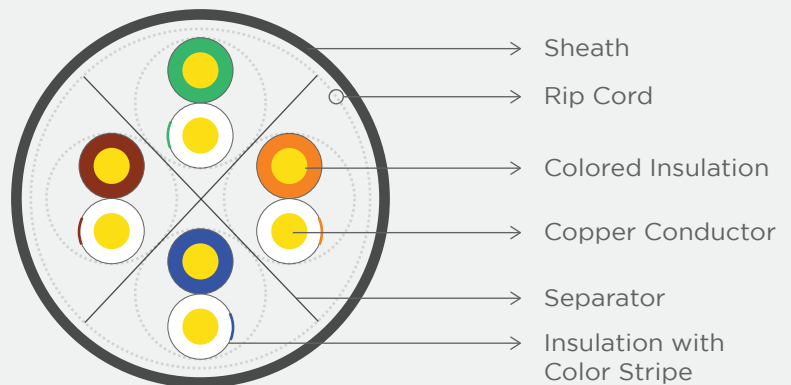

Construction:

Conductor	ETP-grade copper Ø 23 AWG
Insulation	Polyolefin / Fluoropolymer
Twisting	2 insulated conductors forming one pair
Cable Lay- up	4 twisted pairs / separator
Sheath	CMR / CMP-rated
Nominal Cable Diameter	6.0 mm

Mechanical Properties:

Bending Radius : < 4 X Cable Dia. (mm) at 20°C ± 1°C
 Pulling Force : 112N (25 lbs)

Temperature Range

Operation : -20° to + 70°C
 Installation : 0° to + 50°C

Electrical Properties at 20°C:

Impedance	: 100 ± 15 Ω	Resistance Unbalance (Ind.)	: 5% Max
Conductor Resistance	: ≤ 9.38 Ω / 100m	Capacitance Unbalance	: 330pF/100m
Mutual Capacitance	: < 5.6nF/100m	Delay Skew	: < 45nS

Transmission Characteristics at 20°C

Frequency (MHz)	RL (dB) Min.	IL (dB) Max.	NEXT*(dB) Min.	ACRF (dB) Min.	PSACRF (dB) Min.	PSNEXT(dB) Min.	Prop. Delay (ns/100M) Max.
1	20.0	2.0	74.3	67.8	64.8	72.3	570
4	23.0	3.8	65.3	55.8	52.8	63.3	552
8	24.5	5.3	60.8	49.7	46.7	58.8	547
10	25.0	6.0	59.3	47.8	44.8	57.3	545
16	25.0	7.6	56.2	43.7	40.7	54.2	543
20	25.0	8.5	54.8	41.8	38.8	52.8	542
25	24.3	9.5	53.3	39.8	36.8	51.3	541
31.25	23.6	10.7	51.9	37.9	34.9	49.9	540
62.5	21.5	15.4	47.4	31.9	28.9	45.4	539
100	20.1	19.8	44.3	27.8	24.8	42.3	538
200	18.0	29.0	39.8	21.8	18.8	37.8	537
250	17.3	32.8	38.3	19.8	16.8	36.3	536
300*	16.8*	36.43*	37.1*	18.3*	15.3*	35.1*	536*
400*	15.9*	42.97*	35.3*	15.8*	12.8*	33.3*	536*
500*	15.2*	48.94*	33.8*	13.8*	10.8*	31.8*	536*

* All values beyond 250 MHz are for information only

Color Code:

PAIR NO	COLOR
1	White-Blue Stripe and Blue
2	White-Orange Stripe and Orange
3	White- Green Stripe and Green
4	White-Brown Stripe and Brown

Jacket Color (C1 C2):

 Grey (01)	 Blue (02)
 Black (08)	 White (04)

Packaging: Available in Reelex-II (03) of guaranteed 1000ft length
 (P1 P2) Available in Reel of 1000ft length (04) / Reel of 1640ft length (05)

Product Code / Part No:

Part No	Product Name	Fire Rating
211222-C1C2P1P2	NetXs Category 6 4/23 UTP CMR Cable	UL-CMR
211224-C1C2P1P2	NetXs Category 6 4/23 UTP CMP Cable	UL-CMP



The information given herein, including drawings, illustrations and schematics are intended for illustration purposes only and is believed to be reliable. However, Sterlite Technologies makes no warranties to its accuracy or completeness and disclaims any liability in connection with its use. Sterlite Technologies obligations shall be only set forth in Sterlite Technologies standard terms and conditions of the sale and in no case, Sterlite Technologies be liable for any incidental, indirect or consequential damages arising out of sale, resale, use or misuse of the product.

Users of Sterlite Technologies products should make their own evaluation to determine the suitability of such each product for the specific application.