


COMPACT FRAME						
UPRIGHTS TYPE	WIDTH UPRIGHTS WITH PATCH CORD DUCT SUPPORT AND METAL PLATES	HEIGHT	DEEP UPRIGHTS WITH PATCH CORD DUCT SUPPORT AND MFB SUBRACK	CAPACITY SUBRAKS SERIES MFB (DEEP)	MODULARAITY STEP 1 UPRIGHT + 1 UPRIGHT	COLOR
FIRST OSP	510	2200	690	6 (270mm)	400 mm	Black
OSP	~600	2200	690	6 (270mm)	400 mm	
EQUIPMENT	~660	2200	690	6 (270mm)	400 mm	

CF ORDERING INFORMATION



SERIES NAME	UPRIGHT TYPE	FRAME KIT NAME
CF	FRIST OSP	—
	OSP	—
	EQUIPMENT	—
	-	Perimeter Protection Kit
	-	Terminal Frames Protection Kit

CF COMPONENTS

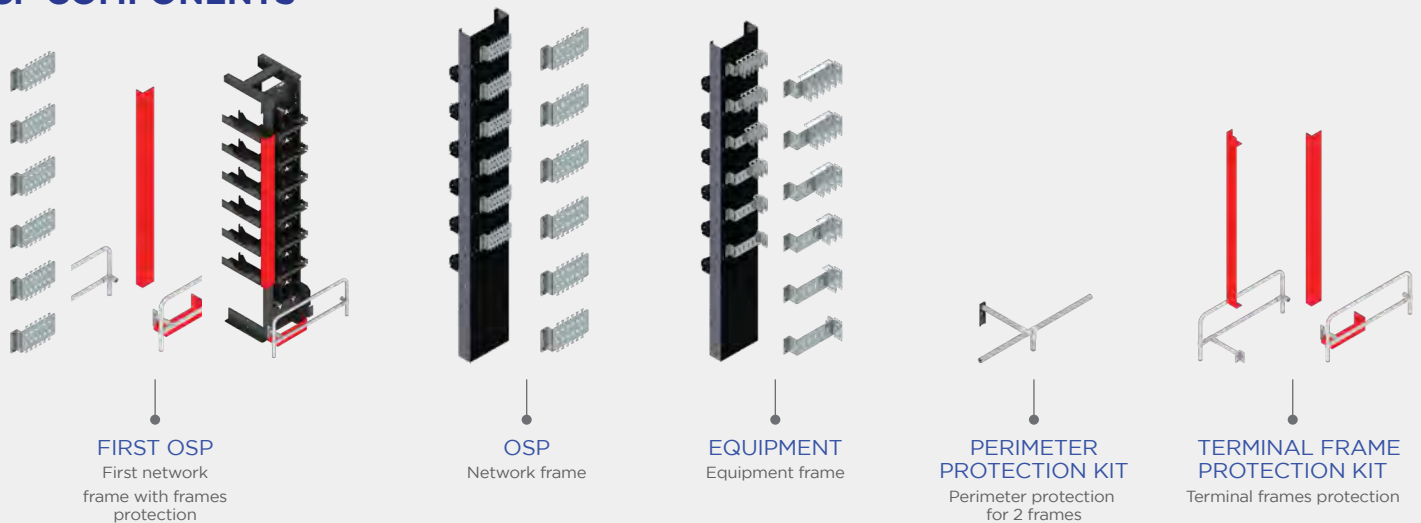

PACKAGING FEATURES

COMPONENTS NAME	PACKAGING TYPE	DIMENSIONS (mm)			GROSS WEIGHT (kg)
		WIDTH	DEPTH	HEIGHT	
CF-FIRST OSP	Carton box	2250	370	370	40
CF-OSP	Carton box	2250	370	370	40
CF-EQUIPMENT	Carton box	2250	370	370	40
CF-PERIMETER PROTECTION KIT	Carton box	120	800	40	0,5
CF-TERMINAL FRAMES PROTECTION KIT	Carton box	1350	350	100	9

The information given herein, including drawings, illustrations and schematics are intended for illustration purposes only and is believed to be reliable. However, STL makes no warranties to its accuracy or completeness and disclaims any liability in connection with its use. STL obligations shall be only set forth in STL standard terms and conditions of the sale and in no case, STL be liable for any incidental, indirect or consequential damages arising out of sale, resale, use or misuse of the product.

Users of STL products should make their own evaluation to determine the suitability of such each product for the specific application.