



Installation Instruction

Number-Review:

Data:

07-03-23

Page:

1/2


Title:

Removing the LC connectors to enable a splice network connection.


Review	Date	Description	Prepared	Verified	Approved
01	9-3-23	1 st Draft	Chris Taylor	Chris Taylor	Chris Taylor

**Removing the LC connectors to enable
a splice network connection.**

Title: **Removing the LC connectors to enable a splice network connection.**

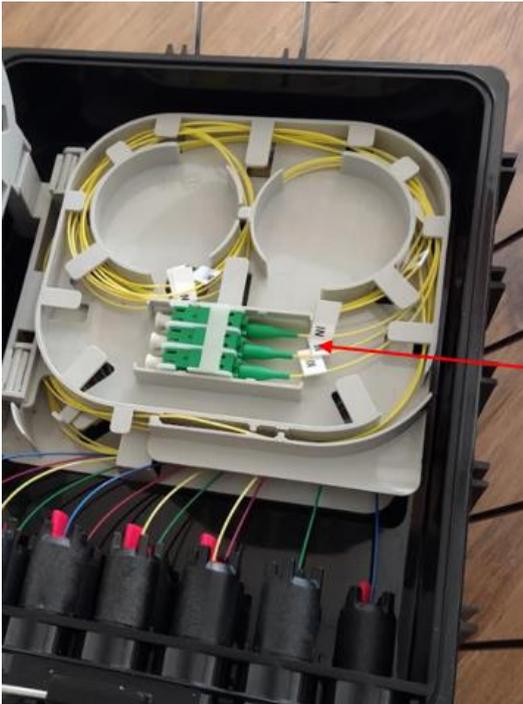

When making a spliced network connection, cut splitter input tails here. Then remove tails from middle tray.

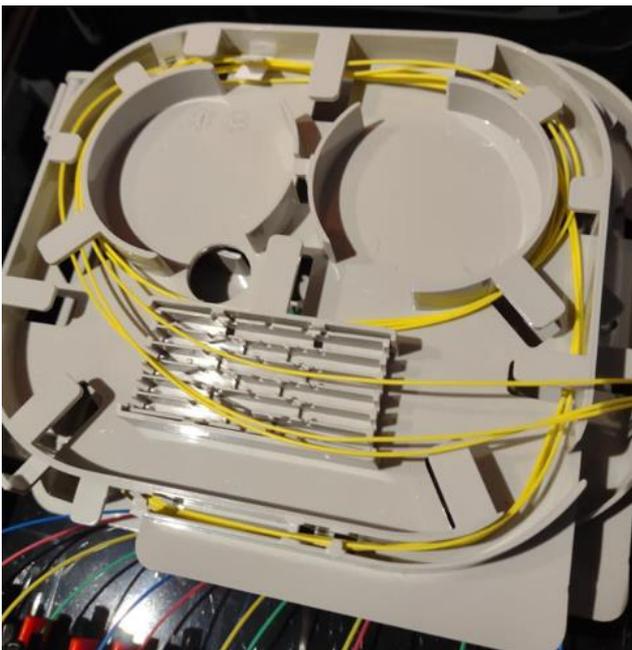

Re-route the splitter inputs from the base to the top tray as shown. Then run the network inputs to the top tray as shown in the network installation guide and splice.