



Atlas-Lite


Unitube Gel Filled OFC
2F - 24F | G.652.A1 Single Mode Fibre

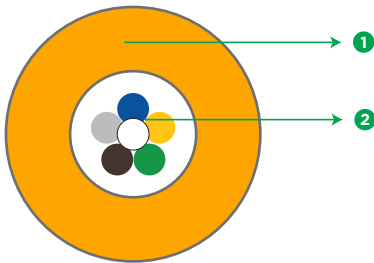

Cross Section 6F

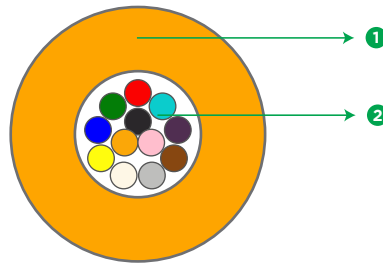

Cross Section 12F

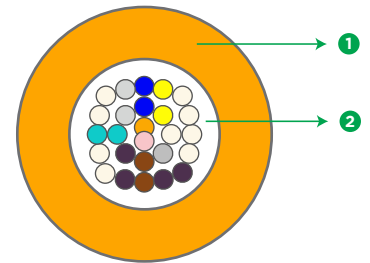

Cross Section 24F

1 OUTER SHEATH

2 FIBRE AND GEL FILLING

* Typical Construction Diagram - Not to Scale

Features & Benefits

- Optimized for blowing in 7/4 mm and 10/6 mm micro-ducts
- Double layer wall with high modulus material in the inner layer and low friction material in the outer layer for high mechanical resistance and optimum blowing performances
- UV Resistant
- Flexible, light weight, easy to handle and install

Product Details

STL Atlas Lite Out-Side Plant Fibre Optic Cable is generally used in the drop section of FTTx networks based on micro-ducts. They feature light weight and small diameter and are designed for optimum blowing performances in single or bundled 7/4mm and 10/6mm micro-ducts. The double layer construction of the buffer tube wall provides high mechanical resistance and optimum blowing performances paired with small outer diameter and light weight.

Fibres and Cable Performance Standards

The cables comply to the following standards IEC 60793-2-50, IEC 60794-5-10, Telcordia GR-20, ITU-T G652 and/or G657, RoHS, REACH.

Printing Details

Printing: STERLITE SM FIBRE TYPE FIBRE COUNT ATLAS-LITE OFC LASER SYMBOL TELEPHONE SYMBOL YEAR OF MANUFACTURE LENGTH CODE METER MARKING.

Printing method: Ink-Jet

Note: The accuracy of marking shall be + 0.5%. Occasional loss of printing & remarking shall be as per Bell core GR 20 and this supersedes the earlier markings.

Specifications

Physical Characteristics	
Maximum Cabled Fibre Attenuation (dB/km)	1310nm: 0.35; 1550nm: 0.23; 1625nm: 0.26
PMD LDV (ps/sqrt.km)	≤ 0.1
Outer Sheath Material	UV Resistant Orange ¹ , double layer: high modulus inner/low friction outer

Fibres Colour Sequence (as per DIN/VDE 0888) ^{2,3}											
Red	Green	Blue	Yellow	White	Grey	Brown	Violet	Turquoise	Black	Pink	Orange

Note: ¹Other jacket colours are available on demand, prior approval

²The fibres 13 to 24, when present, have a black ring marking (the back fibre is replaced by a natural fibre with black ring marking)

³Other fibres colour sequences are available on demand, prior approval.

Cable Designs ⁴					
Product Code	Fibre count	Fibre Type	Cable Diameter (mm) ±0.1	Cable Weight (kg/km) ±10%	Tensile Strength Short Term (N)
E30002S101GACN00J1	2	G.657 A1	2.0	6	70
E30004S101GACN00J1	4	G.657 A1	2.0	6	70
E30006S101GACN00J1	6	G.657 A1	2.0	6	70
E30008S101GACN00J1	8	G.657 A1	2.3	6	70
E30012S101GACN00J1	12	G.657 A1	2.3	6	70
E30024S801GACN00J1	24 ⁵	G.657 A1	2.5	6	80

Note: ⁴Selection of available fibres in the respective Product Ordering Information sections, other fibre type are also available on demand prior approval.

⁵The 24 fibre design is based on 200µm Fibres.

Specifications

Mechanical & Environmental Characteristics		
Cable Characteristics	Cable Performance	Testing Standard Method
Tensile Strength Short term	As per above table	IEC-60794-1-21-E1
Crush Resistance (N/cm)	800	IEC-60794-1-21-E3A
Impact Strength(Nm)	1	IEC-60794-1-21-E4
Torsion	±180°	IEC-60794-1-21-E7
Repeated Bending	20 x OD	IEC-60794-1-21-E6
Bend	20 x OD	IEC-60794-1-21-E11A
Min. Bend Radius (During Installation)	15 x OD	
Min. Bend Radius (After Installation)	10 x OD	
Water Penetration Test	1m waterhead, 3m samples, 24 h	IEC-60794-1-21-F5B
Drip Test	30 cm, 70°C, 24 hr	IEC-60794-1-21-E14
Temperature Performance		IEC-60794-1-22-F1
Installation	-5° C to +50° C	
Operation	-30° C to +70° C	
Storage	-30° C to +70° C	

Note: All tests shall be performed according to the relevant methods of the IEC 60794-1 standard series with limit values and acceptance criteria according to the IEC 60794-5-10 standard.

Packing and Lengths

Drum Type	Length Multiple (in km)
Wooden Drums	4 ± 5% (For all Fibre Counts)

Ordering Information

Other Fibres counts, types and tube colours sequences may be available on request, please create product code from the table below.

Product type		Fibre count (0002 - 0024)				Fibre type		No. of active tubes (01)		Cable core type	Fibres colour code		Jacket type		Running number		Special requirement	
		1				2		3			4						5	
E	3	-	-	-	-	-	-	0	1	G	-		C	N	0	0	J	1

1. Fibre count by indicating the corresponding number from 0002 to 0024
2. Fibre code corresponding to requested fibre type among following options

Fibre code		Fibre type (ITU-T)	STL's Fibre Name
S	1	G657.A1	BOW-LITE
S	8	G.657 A1 200um	MICRO BOW-LITE
S	2	G657.A2	BOW-LITE (E)
S	9	G.657 A2 200um	MICRO BOW-LITE(E)
S	N	G657A1 adv /G652D	OH-LITE NOVA

3. Number of active tubes : 01

4. Fibres colour sequence available options⁶

Code	Fibres and Tubes Colour Codes
A	EIA/TIA 598 C
D	DIN/VDE 0888
F	France
H	Switzerland
I	Italy
L	Hungary
M	Poland
Note: ⁶ other colour codes are available on demand prior STL approval	

5. Special requirement:

Code	Special requirement
J1	Orange Colour Jacket
00	Black Colour Jacket

For additional information please contact your sales representative.

You can also visit our website at www.stl.tech

The information given herein, including drawings, illustrations and schematics are intended for illustration purposes only and is believed to be reliable. However, STL makes no warranties to its accuracy or completeness and disclaims any liability in connection with its use. STL obligations shall be only set forth in STL standard terms and conditions of the sale and in no case, STL be liable for any incidental, indirect or consequential damages arising out of sale, resale, use or misuse of the product. Users of STL products should make their own evaluation to determine the suitability of such each product for the specific application.