



Micro-Lite High Density

Multitube Gel Filled OFC

144F - 576F

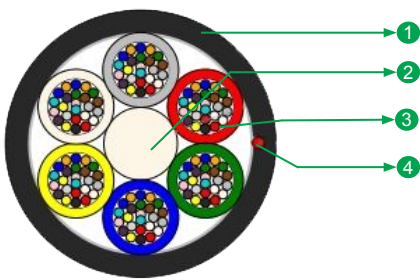

Cross Section 144F

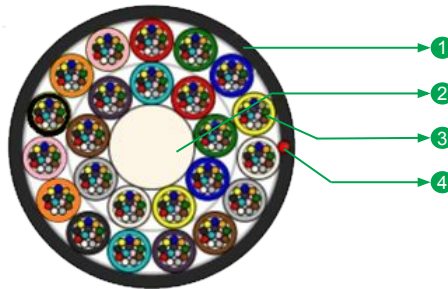

Cross Section 288F

1 OUTER JACKET

2 STRENGTH MEMBER

3 GEL FILLED TUBES

3 RIPCORD(S)

* Typical Construction Diagram - Not to Scale

Features & Benefits

- As compared to conventional cable, Micro Cable diameter is smaller thereby reducing transportation and installation costs
- Excellent solutions for new and existing duct systems
- Typically blown into micro ducts previously installed into large ducts
- Dry water-blocking technology for gel free core helps in quicker end preparation
- Easily removable rugged thermoplastic jacket
- Flexible, light weight, easy to handle and install
- Class Fca rated according to CPR

Product Details

STL Micro-LITE High Density Multitube Single Jacket Optical Fibre Cables are typically used in micro duct applications.

This cable is a stranded micro loose tube cable with optical fibres placed inside robust buffer tubes stranded around a Fibre Reinforced Plastic (FRP) central strength member. In addition to optical Fibres, the buffer tubes contain water blocking gel to prevent water propagation along the cable.

Fibres and Cable Performance Standards

The fibres and cables are compliant with the following standards: IEC 60793, IEC 60794-5-10, ITU-T, RoHS, REACH.

Printing Details

Printing: STERLITE SM FIBRE TYPE FIBRE COUNT F MICRO OFC CE MARKING Fca LASER SYMBOL TELEPHONE SYMBOL YEAR OF MANUFACTURE LENGTH CODE METER MARKING

Note: The accuracy of marking shall be + 0.5%. Occasional loss of printing & remarking shall be as per Bell core GR 20 and this supersedes the earlier markings.

Specifications

Physical Characteristics	
Maximum Cabled Fibre Attenuation (dB/km)	1310nm: 0.35; 1550nm: 0.23; 1625nm: 0.26
PMD LDV (ps/√km)	≤ 0.1
Fibres per Tube	12 or 24
Central Strength Member	FRP (Fibre Reinforced Plastic)
Fillers	Thermoplastic material, natural colour
Core binder	Binders and water swellable yarns
No of Ripcords Below Inner Sheath	1
Outer Jacket Material	UV Proof Black, HDPE

Fiber Color Sequence (AS per EIA/TIA 598C)²

Blue	Orange	Green	Brown	Slate	White	Red	Black	Yellow	Violet	Rose	Aqua
------	--------	-------	-------	-------	-------	-----	-------	--------	--------	------	------

Note: ¹PA jacket and/or other jacket colours are available on demand, prior approval

²The fibres 13 to 24, when present, have a black ring marking (the black fibre is replaced by a natural fibre with black ring marking), the tubes follow the same sequence as the fibres and the tubes above 12, when present, have a longitudinal black stripe ink-jet marked or co-extruded (black tube with white stripe).

Cable Designs with G.657 A1/G.652 D/G.657 A2 200µm Fibres⁴

Product Code	Fibre count	Fibre type	Tubes/ Fillers	Duct ID (mm)	Cable Diameter (mm) ±0.3mm	Cable Weight (kg/km) ± 10%	Max. Tensile Strength (N)
C30144N206GAP10000	144	G.657 A1/G.657 D 200	6/0	8	5.5	30	500
C30192N208GAP10000	192	G.657 A1/G.657 D 200	8/0	8	6.3	42	500
C30216N209GAP10000	216	G.657 A1/G.657 D 200	9/0	10	6.8	50	1000
C30288N224GAP10000	288	G.657 A1/G.657 D 200	(9+15)/0	10	7.4	55	1000
C30432N218GAP10000	432	G.657 A1/G.657 D 200	(6+12)/0	12	8.2	65	800
C30576N224GAP10000	576	G.657 A1/G.657 D 200	(9+15)/0	14	9.5	84	1000

Note: ⁴Selection of available fibres in the respective Product Ordering Information sections, other fibre types are available on demand prior approval.

Specifications

Mechanical & Environmental Characteristics		
Cable Characteristics	Cable Performance	Testing Standard Method
Tensile Strength	As per above table	IEC-60794-1-21-E1
Crush Resistance (N/10cm)	500	IEC-60794-1-21-E3A
Impact Strength(N-m)	2	IEC-60794-1-21-E4
Torsion	±180°	IEC-60794-1-21-E7
Repeated Bending	20 x OD	IEC-60794-1-21-E6
Bend	20 x OD	IEC-60794-1-21-E11A
Min. Bend Radius (During Installation)	20 D	
Min. Bend Radius (After Installation)	15 D	
Water Penetration Test	1m waterhead, 3m samples, 24 h	IEC-60794-1-21-F5B
Drip Test	30 cm, 70° C, 24 hr	IEC-60794-1-21-E14
Temperature Performance		IEC-60794-1-22-F1
Installation	-5° C to +50° C	
Operation	-30° C to +70° C	
Storage	-40° C to +70° C	

Note: All tests shall be performed according to the relevant methods of the IEC 60794-1 standard series with limit values and acceptance criteria according to the IEC 60794-5-10 standard.

Packing and Lengths

Drum Type	Length Multiple (in km)	Order Tolerance	Short Lengths
Wooden Drums	4 6 km (13,123 20,000 ft) ± 5%	±5%	Max 5%, upon customer approval

Ordering Information

Other Fibres counts, types and tube colours sequences may be available on request, please create product code from the table below.

Product type		Fibre count (0144 – 0864)				Fibre type		No. of active tubes (06-24)		Cable core type	Fibres/tubes colour code	Jacket type		Running number		Special requirement	
1		2				3		4			5						
C	3	-	-	-	-	N	2	-	-	G	-	P	1	0	0	0	0

1. Product type

Code	Cable Design
C3	Micro-Lite NextGen cable with 200µm fibres

2. Fibre count by indicating the corresponding number from 0144 to 0576

3. Fibre code corresponding to requested fibre type among following options

Fibre code		Fibre type (ITU-T)	STL's Fibre Brand Name	Mode Field Diameter (MFD) @1310 nm (µm)
N	2	G.657 A1/G.652 D 200µm	Nova 200 LMB	9.2 ± 0.4

4. Number of active tubes : 06 to 24

5. Fibres and tubes colour sequence available options⁵

Code	Fibres and Tubes Colour Codes
A	EIA/TIA 598 C
D	DIN/VDE 0888
F	France
H	Switzerland
I	Italy
L	Hungary
M	Poland
Note: ⁵ other colour codes are available on demand prior approval	

For additional information please contact your sales representative.

You can also visit our website at www.stl.tech

The information given herein, including drawings, illustrations and schematics are intended for illustration purposes only and is believed to be reliable. However, STL makes no warranties to its accuracy or completeness and disclaims any liability in connection with its use. STL obligations shall be only set forth in STL standard terms and conditions of the sale and in no case, STL be liable for any incidental, indirect or consequential damages arising out of sale, resale, use or misuse of the product. Users of STL products should make their own evaluation to determine the suitability of such each product for the specific application.