


CRS (CONNECTOR RUGGEDISING SHELL)

IP 68 CRS kit for LC drop connector assemblies

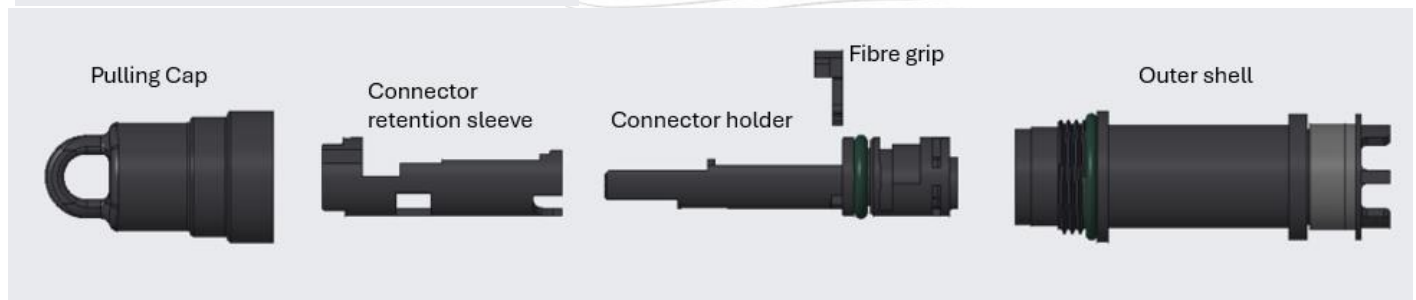

Specifications.

- Use with Virgin media approved 1.1mm diameter drop cable and Virgin media approved 6mm drop microduct.
- Use with Ridgmount and Senko field assembled LC connectors.
- Tensile retention of Micro duct minimum 200N
- Tensile retention of drop cable minimum 15N
- IP68 Compliant
- ROHS compliant.
- Operating temp -30° to +60° C
- IEC 61300-3-1

Sterlite Technologies Limited

IFFCO Tower, 3rd Floor, Plot No.3, Sector 29, Gurugram - 122002, Haryana, India

Registered office: E1, MIDC Industrial Area, Aurangabad - 431 136, Maharashtra, India . CIN - L31300MH2000PLC69261