


Patch Cords and Pigtails

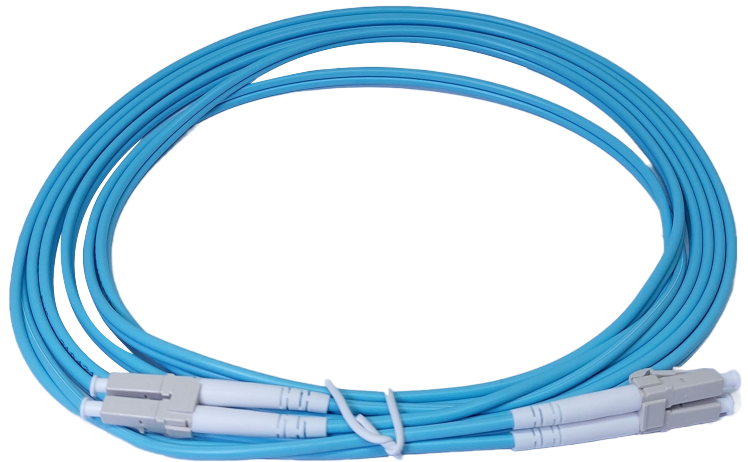

STL offers high performance optical fiber patch cords and pigtails that are ideal for many fiber optic applications such as telecommunications, enterprise data centers, and FTTx. Patch Cords are connectorized on both ends, while pigtails are single end terminated and ready for splicing. They are typically used to cross-connect patch panel to patch panel and to interconnect patch panels directly to optical transmission equipment.

Features & Benefits

- Ultra polish (UPC) and Angle polish (APC) available
- IEC Grade B standard
- IEC Grade A quality is available on request.
- Qualified to Telcordia GR326 and IEC 61300 standards.
- RoHS compliant materials.
- Available in various fiber types including single mode G.652.D, G657.A1, or G657.A2, and multimode OM1, OM2, OM3, or OM4.
- Simplex and Duplex available, with 1.6m, 2mm or 3mm diameter.
- Pigtails available as sets in 2, 4, 6, or 8 colors.
- Connector options include SC, LC, FC, ST, MU, and E2000.
- LSZH standard jacket.
- Various sheath colors are available.
- Pulls tab, and short boot options available.

Applications

- Telecommunications
- CATV
- Data communications
- Wide area network applications

Product Specifications

Fiber Type		
Maximum Insertion Loss (dB)	IEC 61300-3-4	< 0.25
Maximum Return Loss (dB)	IEC 61300-3-6	For PC: < -50 For APC: < -60
Mechanical Performance		
Impact Test	IEC 61300-2-12	
Fiber Cable Retention Test	IEC 61300-2-4	
Tensile Strength of Coupling Mechanism Test	IEC 61300-2-6	
Impact Test	IEC 61300-2-12	
Fiber Cable Retention Test	IEC 61300-2-4	
Torsion Test	IEC 61300-2-5	
Optical Fiber Cable Flexing Test	IEC 61300-2-44	
Environmental Performance		
Vibration Test	IEC 61300-2-1	
Cold Test	IEC 61300-2-17	
Dry Heat High Temperature Endurance Test	IEC 61300-2-18	
Change of Temperature	IEC 61300-2-22	
Composite Temperature Humidity Cyclic Test	IEC 61300-2-21	

Part Number Configurator

Patch Cord

1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18
Product Type			Length			UoM	1st & 2nd Connector		Dash	Fiber Type	Dash	Diameter		Dash	Termination	Dash	Color
P	A	T	1	5	0	M	C	H	-	B	-	2	0	-	S	-	9

Pigtail

1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16
Product Type			Dash	Length	UoM	Connector	Dash	Fiber Type	Dash	Diameter		Dash	Termination	Dash	Color
P	I	G	-	2	M	D	-	B	-	0	9	-	S	-	9

Product Type		UoM - Length		Connector		Fiber Type		Diameter		Termination		Color	
PAT	Patch Cord	M	in Meters	A	FCU	A	SM G652D	09	LSZH 0.9 mm	S	Simplex	1	Blue
PIG	Pigtail	F	in Feet	B	FCA	B	SM 657A	16	LSZH 1.6 mm	D	Duplex	2	Orange
				C	SCU	C	SM G655C	20	LSZH 2.0 mm			3	Green
				D	SCA	D	MM 62.5/125 OM1	30	LSZH 3.0 mm			4	Brown
				E	STU	E	MM 50/125 OM2	R6	OFNR 1.6 mm			5	Grey
				H	LCU	F	MM 50/125 OM3	R2	OFNR 2.0 mm			6	White
				J	LCA	G	MM 50/125 OM4	R3	OFNR 3.0 mm			7	Red
				L	SCMM	H	SM G657B	P6	OFNP 1.6 mm			8	Black
				M	FCMM	J	SM G657C	P2	OFNP 2.0 mm			9	Yellow
				N	LCMM	K	SM G657A2 (A+B)	P3	OFNP 3.0 mm			E	Violet
				P	STMM	L	MM 50/125 OM5					M	Pink
				U	SCA Premium							A	Aqua
				Y	SCAPC Low Loss Tuned							N	Set of 2 color
												P	Set of 4 color
												Q	Set of 6 color
												R	Set of 8 color
												S	Set of 12 color

3.3/082025

For additional information please contact your sales representative.

You can also visit our website at www.stl.tech

The information given herein, including drawings, illustrations and schematics are intended for illustration purposes only and is believed to be reliable. However, STL makes no warranties to its accuracy or completeness and disclaims any liability in connection with its use. STL obligations shall be only set forth in STL standard terms and conditions of the sale and in no case, STL be liable for any incidental, indirect or consequential damages arising out of sale, resale, use or misuse of the product. Users of STL products should make their own evaluation to determine the suitability of such each product for the specific application.