

SPLITTERS

SPLICE BAY

16 Port IP68 DP

STL 16 Port DP is an IP68 (2m) enclosure with capacity for 16 IP68 fibre drop connections located underground in a chamber.

The DP is compatible with the STL CRS (Connector Ruggedized System), which is suitable for use with LC/APC blown fiber connectors from Ridgmount or Hexatronic.

The information given herein, including drawings, illustrations and schematics are intended for illustration purposes only and is believed to be reliable. However, STL makes no warranties to its accuracy or completeness and disclaims any liability in connection with its use. STL obligations shall be only set forth in STL standard terms and conditions of the sale and in no case, STL be liable for any incidental, indirect or consequential damages arising out of sale, resale, use or misuse of the product. Users of STL products should make their own evaluation to determine the suitability of such each product for the specific application.

KEY FEATURES AND BENEFITS

- IP68 to a depth of 2m
- Splitter 1 x 1:16 splitters
- 16 x Customer drops

TECHNICAL INFORMATION


WAVELENGTH	1310nm	1550nm
INSERTION LOSS	<7.70dB	<7.70dB
BACK REFLECTION	<55.0dB	<55.0dB
UNIFORMITY	<0.70dB	<0.70dB

PRODUCT NAME	PACKAGING TYPE	WIDTH & LENGTH	DEPTH	WEIGHT
STL-OPTOTEC CRS16	Carton Box	300	60	2.5KG

Ordering Information

REFERENCE PN	DESCRIPTION	Virgin media SKU number
FBR1071004050600M	16 PORT-IP68	10017828

The information given herein, including drawings, illustrations and schematics are intended for illustration purposes only and is believed to be reliable. However, STL makes no warranties to its accuracy or completeness and disclaims any liability in connection with its use. STL obligations shall be only set forth in STL standard terms and conditions of the sale and in no case, STL be liable for any incidental, indirect or consequential damages arising out of sale, resale, use or misuse of the product. Users of STL products should make their own evaluation to determine the suitability of such each product for the specific application.

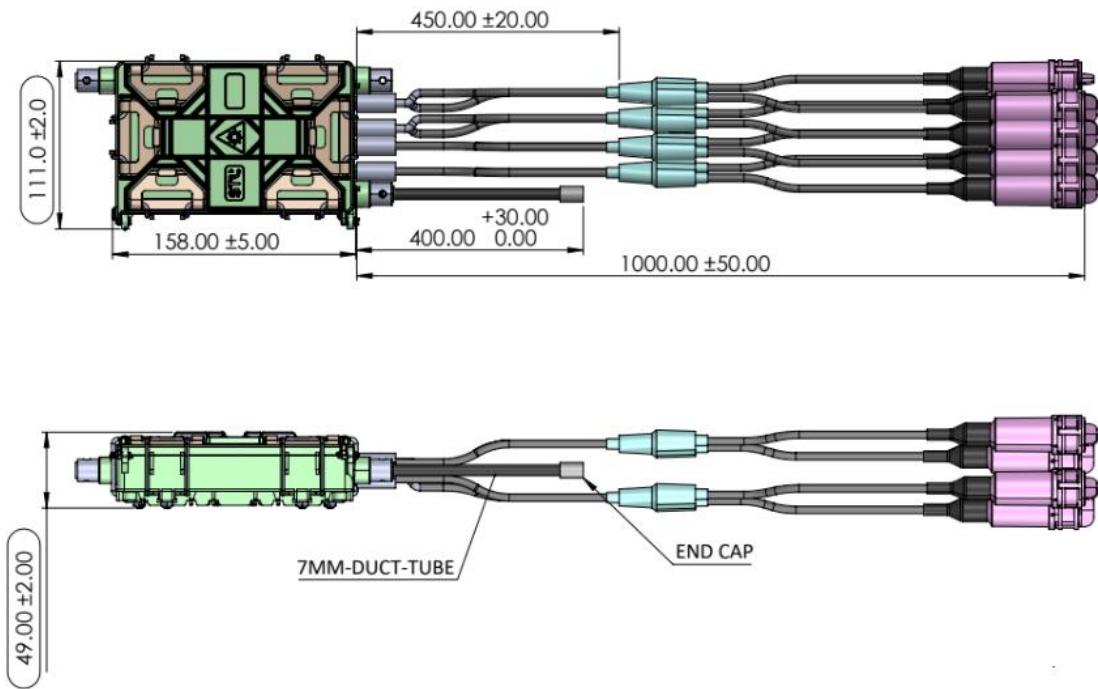

The information given herein, including drawings, illustrations and schematics are intended for illustration purposes only and is believed to be reliable. However, STL makes no warranties to its accuracy or completeness and disclaims any liability in connection with its use. STL obligations shall be only set forth in STL standard terms and conditions of the sale and in no case, STL be liable for any incidental, indirect or consequential damages arising out of sale, resale, use or misuse of the product. Users of STL products should make their own evaluation to determine the suitability of such each product for the specific application.