

8 Port IP68 DP Pre-Tailed

STL 8 Port DP is an IP68 (2m) enclosure with capacity for 8 IP68 fibre drop connections located underground in a chamber.

Can be extended to 12 ports via the 4 port extension module.

The DP is compatible with the STL CRS (Connector Ruggedized System), which is suitable for use with LC/APC blown fiber connectors from Ridgmount or Hexatronic.

KEY FEATURES AND BENEFITS

- IP68 to a depth of 2m
- Splitter 2 x 1:4 splitters
- Pre-tailed with 4F ULW
- 8 x Customer drops as standard with option to extend to 12

The information given herein, including drawings, illustrations and schematics are intended for illustration purposes only and is believed to be reliable. However, STL makes no warranties to its accuracy or completeness and disclaims any liability in connection with its use. STL obligations shall be only set forth in STL standard terms and conditions of the sale and in no case, STL be liable for any incidental, indirect or consequential damages arising out of sale, resale, use or misuse of the product. Users of STL products should make their own evaluation to determine the suitability of such each product for the specific application.

TECHNICAL INFORMATION


WAVELENGTH	1310mm	1550mm
INSERTION LOSS<150M	<7.70dB	<7.70dB
INSERTION LOSS<200M	<7.76dB	<7.76dB
INSERTION LOSS<300M	<7.79dB	<7.79dB
INSERTION LOSS<400M	<7.82dB	<7.82dB
INSERTION LOSS<500M	<7.85dB	<7.85dB
BACK REFLECTION	<55.0dB	<55.0dB
UNIFORMITY	<0.70dB	<0.70dB

PRODUCT NAME	PACKAGING TYPE	WIDTH & LENGTH	DEPTH	WEIGHT
STL-OPTOTEC CRS8-25	Carton Box	300	60	2.5KG
STL-OPTOTEC CRS8-50	Carton Box	300	60	3.2KG
STL-OPTOTEC CRS8-100	Carton Box	300	100	4.5KG
STL-OPTOTEC CRS8-150	Carton Box	300	125	6.1KG
STL-OPTOTEC CRS8-225	Carton Box	300	165	8KG
STL-OPTOTEC CRS8-500	Carton Box	300	230	18.1KG

The information given herein, including drawings, illustrations and schematics are intended for illustration purposes only and is believed to be reliable. However, STL makes no warranties to its accuracy or completeness and disclaims any liability in connection with its use. STL obligations shall be only set forth in STL standard terms and conditions of the sale and in no case, STL be liable for any incidental, indirect or consequential damages arising out of sale, resale, use or misuse of the product. Users of STL products should make their own evaluation to determine the suitability of such each product for the specific application.

Ordering Information

REFERENCE PN	DESCRIPTION	TAIL LENGTH Meters	Virgin media SKU number
FBR103100625MR	8PORT-IP68TAILED-25	25	10016476
FBR103100650MR	8PORT-IP68TAILED-50	50	10016477
FBR1031006100MR	8PORT-IP68TAILED-100	100	10016478
FBR1031006150MR	8PORT-IP68TAILED-150	150	10016479
FBR1031206225MR	8PORT-IP68TAILED-225	225	10016480
FBR1031006500MR	8PORT-IP68TAILED-500	500	1001640
FCFTTH060902SO3	ADDITIONAL LABELLING KIT		10016544
FBR10308020706NA	4 PORT EXTENSION		10017791

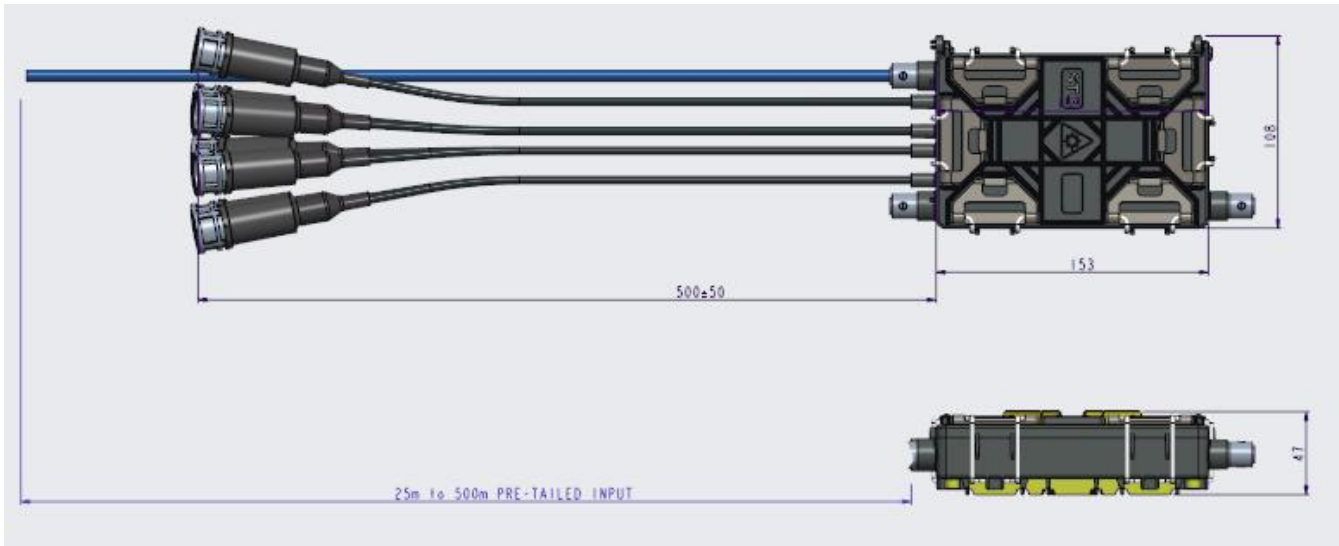

The information given herein, including drawings, illustrations and schematics are intended for illustration purposes only and is believed to be reliable. However, STL makes no warranties to its accuracy or completeness and disclaims any liability in connection with its use. STL obligations shall be only set forth in STL standard terms and conditions of the sale and in no case, STL be liable for any incidental, indirect or consequential damages arising out of sale, resale, use or misuse of the product. Users of STL products should make their own evaluation to determine the suitability of such each product for the specific application.